

## WIRELESS DATA LOGGER WITH ANALOG INPUTS ( $\pm 5V$ OR $\pm 10V$ )

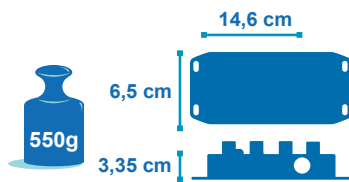
### //APPLICATIONS

**2 year**  
Warranty



**TimeSync**

**made**  
**in**  
**Germany**



### FEATURED VIDEO

- [BeanDevice® AN-V Main presentation Video](#)
- [BeanDevice® AN-V Configuration Video](#)
- [BeanDevice® AN-V Wireless Range Video](#)

### USER MANUAL

- [BeanDevice® ProcessSensor user manual](#)

### SELECTION GUIDE

- [BeanDevice® ProcessSensor selection guide](#)

### MECHANICAL DRAWING

- [BeanDevice® AN-V drawing](#)

### // MAIN FEATURES



Analog inputs  $\pm 5V$  or  $\pm 10V$   
( 4 channels )



Wireless transmission IEEE 802.15.4 with  
antenna diversity



Integrated sensor power supply, software  
configurable 4.5V to 20V



Integrated rechargeable Lithium-Ion  
battery



Embedded data logger up to 1 million  
data points

//EMBEDDED DATA LOGGER UP TO 1 MILLION DATA POINTS

The BeanDevice® AN-V integrates an embedded data logger, which can be used to log data when a Wireless Sensor Networks can not be easily deployed on your site. All the data acquisitions are stored on the embedded flash and then transmitted to the BeanGateway® whenever a Wireless Sensor Network is established.

The Datalogger function is compatible with all the data acquisition mode available on your BeanDevice® AN-V :

- LowDutyCycle Data Acquisition
- Alarm
- Streaming & Streaming packet

EXAMPLE : DATA ACQUISITION SYSTEM FOR TECHNICAL BUILDING MANAGEMENT

- The BeanDevice® AN-V is configured with its Datalogger feature. A standalone installation of the BeanDevice® AN-V will be done (mounted on the walls), without the necessity for any connection to the BeanGateway®.
- Once the sensors are connected, each data is recorded on the embedded flash.
- When needed a technician working on the site can send a request for a log transmission. Then the BeanDevice® AN-V starts sending all its logs. If all the logs are successfully transmitted to the BeanGateway®, the flash memory is erased and new logs will be recorded.



For further information about the Datalogger, please read the following technical note : [TN\\_RF\\_007 – “BeanDevice® DataLogger User Guide”](#)

**// REMOTE CONFIGURATION & MONITORING**
**BeanScape® Basic**

The **BeanScape®** application allows the user to view all the data measurements transmitted by the **BeanDevice® AN-V**. With the **OTAC** (Over-the-Air configuration) feature, the user can remotely configure the **BeanDevice® AN-V**.

SEVERAL DATA ACQUISITION MODES ARE AVAILABLE ON THE BEANDEVICE® AN-V :

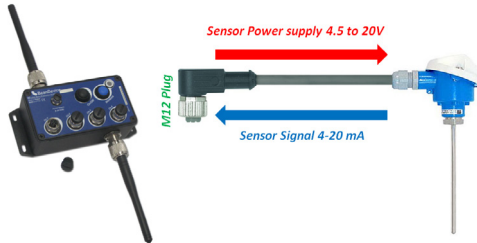
- **Low Duty Cycle Data Acquisition mode (LDCDA)** : the data acquisition is immediately transmitted by radio. The transmission frequency can be configured from 1s to 24h.
- **Alarm Mode** : the measured value is transmitted by radio whenever an alarm threshold (fixed by the user) is detected (4 alarms threshold levels High/Low).
- **Survey Mode** : operates like the Alarm mode but the device sends frequently a beacon frame informing its current status.
- **Streaming Packet Mode** : All measured values are transmitted by packet within a continuous flow at 400 samples per second maximum.
- **Streaming Mode** : all measured values are transmitted in real-time within a continuous flow at 100 samples per second maximum.

**BeanScape® Premium+ Add-on**

The **BeanScape® Premium+** integrates an **OPC DA** server (Data Access). **OPC DA** is particularly well suited for real time measurement and data sharing. Each data/measurement can be associated to a tag or its attributes and shared with one or many **OPC** clients.



For further information about the different data acquisition modes:  
[TN\\_RF\\_008 – “Data acquisition modes available on the BeanDevice®”](#)

**//CONFIGURABLE SENSOR POWER SUPPLY**


The sensor is directly powered by a high accuracy and adjustable DC/DC converter integrated inside the device. The excitation voltage is remotely configurable through the **BeanScape®** (4.5 to 20V).

**Product Reference**
**BND-ANV-NCH-MR**
**N - Number of data acquisition channels:**
**4** : 4 channels

**MR - Measurement Range**
**- 5** :  $\pm 5V$  measurement range , - **10** :  $\pm 10V$  measurement range


**Example** : BND-ANV-4CH-5 , **BeanDevice® AN-V with four channels , measurement range:  $\pm 5V$** 
**Analog data acquisition block specifications**

<b>Signal Conditioning</b>	Analog low voltage measurement
<b>Number of channels</b>	4 Channels
<b>A/D Converter</b>	16 bits - SAR Architecture (Successive Approximation Register) with temperature compensation
<b>Measurement range</b> (analog polarity is configurable from the BeanScape®)	BND-ANV-NCH-5 - IEEE-BT: $\pm 5V$ (bipolar) or 0-10 V (unipolar) BND-ANV-NCH-10 - IEEE-BT: $\pm 10V$ (bipolar) or 0-20 V (unipolar)
<b>Non-linearity error</b>	$\pm 0.5$ LSB
<b>Measurement accuracy(@25°C)</b>	< 0,1% when plugged on external power supply < 0,08% when operating on battery power
<b>Sensor Connector</b>	M12-5Pins coming with an IP rating IP67   Nema 6

**Sensor wiring code (M12 Socket)**
**Caption**
**Pwr+** : sensor power supply (4.5 to 20 Volts)

**Gnd** : electrical ground

**Sens+** : sensor signal + input

**Sens-** : Not used

**Sensor Power Supply specifications**

<b>Excitation voltage range</b>	4.5 Volts to 20Volts , configurable from the BeanScape® software
<b>Excitation voltage accuracy on full scale range(@25°C)</b>	$\pm 0.1\%$
<b>Maximum Output Power (@25°C)</b>	2 Watts

**Over-the-air configuration (OTAC) parameters**

<b>Data Acquisition mode</b>	<ul style="list-style-type: none"> <li>• Low Duty Cycle Data Acquisition (LDCDA) Mode: 1s to 24 hour</li> <li>• Alarm &amp; Survey mode: 1s to 24 hour</li> <li>• Streaming Packet Mode: 400 SPS maximum</li> <li>• Streaming Mode: 100 SPS maximum</li> </ul>
<b>Sampling Rate</b> (SPS = samples per second)	Minimum: 1 SPS Maximum: 400 SPS maximum on each channel
<b>Alarm Threshold</b>	2 high levels alarms & 2 low levels alarms
<b>Sensor power supply</b>	4.5 to 20 Volts
<b>Analog Input polarity</b>	Bipolar or Unipolar
<b>Power Mode</b>	Sleeping, Sleeping with Network Listening & Active
<b>TX Power</b>	-7 dBm/ -1 dBm/ +5 dBm/ +11 dBm/ +15 dBm/ +18 dBm

**RF Specifications**

<b>Wireless Protocol Stack</b>	IEEE 802.15.4 (2006 version)
<b>WSN Topology</b>	Point-to-Point / Star
<b>Data Rate</b>	250 Kbits/s
<b>RF Characteristics</b>	ISM 2.4GHz - 16 Channels
<b>TX Power</b>	+0 dBm to +18 dBm
<b>Receiver Sensitivity</b>	-95.5 dBm to -104 dBm
<b>Maximum Radio Range</b>	1 Km (L.O.S)
<b>Antenna diversity</b>	2 omnidirectional N-Type antenna , gain of 2.2 dBi , IP67   Nema 6

**Embedded Data Logger**

<b>Storage Capacity</b>	up to 1 million data points
<b>Wireless data downloading</b>	3 minutes to download the full memory (average time)

**Environmental and Mechanical**

<b>Enclosure</b>	Aluminium, Watertight IP65 – Fire Protection : ULV94/Getex Enclosure dimensions (without antenna) L x W x H : 146.05 mm x 65.5mm x 33.5 mm
<b>Shock Resistance</b>	10g during 50ms
<b>Operating Temperature</b>	-20 °C to +65 °C
<b>Norms</b>	CE Labelling Directive R&TTE (Radio) ETSI EN 300 328 ROHS - Directive 2002/95/EC

Power Supply	
<b>Integrated battery charger</b>	Integrated Lithium-ion battery charger with high precision battery monitoring : <ul style="list-style-type: none"> <li>· Overvoltage Protection, Overcurrent/Short-Circuit Protection, Undervoltage Protection</li> <li>· Battery Temperature monitoring</li> <li>· Current accumulation measurement</li> </ul>
<b>Current consumption @ 3,3V</b>	<ul style="list-style-type: none"> <li>· During data acquisition : 70mA to 130mA (depends on external sensor power supply)</li> <li>· During Radio transmission : 60 mA @ 0dBm</li> <li>· During sleeping: &lt; 30 µA</li> </ul>
<b>External power supply</b>	External power supply : +8v to +28v
<b>Rechargeable battery</b>	Lithium-Ion high density rechargeable battery capacity of 950 mAh

	Option(s)
<b>Power-supply bloc</b>	Wall plug-in, Switchmode power Supply 12V @ 1,25A with sealed M8 Plug (IP67   Nema 6)
<b>Calibration Certificate</b>	Calibration certificate linked to national and international standards (COFRAC)

//GETTING STARTING WITH A WIRELESS SENSOR NETWORK

DESCRIPTION	STARTERKIT REFERENCE
<b>Starterkit Wireless System acquisition BeanDevice AN-mV</b> 1 x <u>BeanGateway Ethernet (Indoor version), Ref. : BGTW-ETH-IND</u> 1 x <u>BeanDevice AN-V, Ref. : BND-AN-MV-4CH-IEEE</u> 1 x <u>Beanscape Basic, Ref. : BNSC_BASIC</u>	SK_BND_ANV_4CH_IND
<b>Starterkit Wireless System acquisition BeanDevice AN-mV</b> 1 x <u>BeanGateway Ethernet (Outdoor version), Ref. : BGTW-ETH-OUT</u> 1 x <u>BeanDevice AN-V, Ref. : BND-AN-MV-4CH-IEEE</u> 1 x <u>Beanscape Basic, Ref. : BNSC_BASIC</u>	SK_BND_ANV_4CH_OUT

The BeanDevice® AN-V operates only on our Wireless Sensor Networks, you will need the BeanGateway® and the BeanScape® for starting a wireless sensor networks.



OR



Product specifications are subject to change without notice. Contact Beanair for latest specifications.

**//CONTACT US**

FOR MORE INFORMATION :

**[sales@beanair.com](mailto:sales@beanair.com)**Visit our website : **[www.beanair.com](http://www.beanair.com)**Visit our blog : **[www.industrial-wsn.com](http://www.industrial-wsn.com)**

OUR YOUTUBE CHANNEL :



Watch our featured videos on Youtube

**VISIT OUR WEBSITES****VISIT US !**