

BeanDevice® WILOW® AX-3D

ULP (Ultra-Low-Power) Wifi accelerometer with built-in data logger

PRODUCT VIDEO



USER GUIDE



QUICK START



MECHANICAL DRAWING




STEP FILE



MQTT TOOLKET FOR IOT
SENSOR



MADE
IN
GERMANY

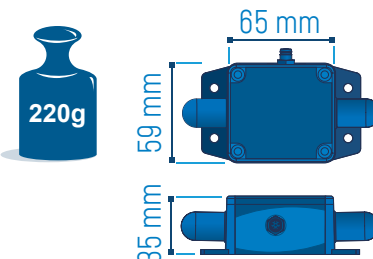

MAIN FEATURES

- ULP (Ultra Low Power) Wifi technology
- Embedded data logger: up to 5 million data points (with events dating)
- High precision accelerometer (measurement range $\pm 2g$ or $\pm 10g$) with FFT, PPV (Peak-Particle Velocity) and Amplitude calculations
- SSD (Smart Shock Detection) allows to trigger data acquisition on a shock detection
- Waterproof (IP67/NEMA 6) and Rugged aluminum casing,
- Over the Air Firmware upgrade via WIFI
- Virtual Inclinometer
- USB 2.0 link for device configuration (including firmware upgrade)
- Store and Forward+: lossless data transmission
- Excellent radio link relying on the radio antenna diversity designed by Beanair®
- IIOT Ready: integrates MQTT data exchange, an open-source Internet of Things (IIOT) protocol
- Smart and flexible power supply:
 - Internal lithium-polymer rechargeable battery (780 mAh)
 - External 5VDC power supply compatible with both USB power and solar energy harvesting

BeanDevice® WILLOW® AX-3D

APPLICATIONS

Test and Measurement



Structural Health Monitoring



Ground Vibration Monitoring



IIOT



MQTT

Ready for Industrial
Internet of Things ?



Third - party WIFI Bridge

Third - party Wifi Access Point



WIFI Access Point



Wilow AX-3D

AN OPEN-STANDARD & INDUSTRIAL WIFI TECHNOLOGY

- ULP (Ultra Low power) Wifi – IEEE 802.11 b/g/n
- Lower total cost of ownership-works with existing access points
- Large installed base and consequent broad-based familiarity with configuration, use and troubleshooting at the physical and link layers
- Easy provisioning & IT friendly: our ULP wifi sensors use IP-over-Ethernet networking environment

A RELIABLE WIFI TECHNOLOGY THANKS TO OUR “STORE AND FORWARD+” FUNCTION



The store and forward technique works by storing the message transmitted by the **BeanDevice® Wilow** (wireless DAQ/sensor) to a Wifi access point/ Wifi receiver. If the message is not received due to a network disruption, it will be retransmitted on the next transmission cycle. This technique allows to bring a lossless data transmission.

User can also enable the Hard real-time option; i.e. the message must be received by the Wifi Access Point/Wifi Receiver within the confines of a stringent deadline. It is automatically deleted if it failed to reach its destination within the allotted time span

TECHNICAL SPECIFICATIONS

PRODUCT REFERENCE

BND-WILOW-WIFI-AX3D-MR-APWR-MO

MR - Measurement Range:

2G: ±2g measurement range

10G: ±10g measurement range

APWR -Auxiliary External Power supply

EHR - Power supply compatible with solar energy harvesting 6-24VDC

MO - Mounting option

BR - 90° Mounting bracket

M - Magnetic Mounting

Example 1: BND-WILOW-WIFI-AX3D-10G-BR

ULP WIFI accelerometer with ±10g range with 90° Mounting bracket

Example 2: BND-WILOW-WIFI-AX3D-2G-M

ULP WIFI accelerometer with ±2g range with magnetic mounting

Example 3: BND-WILOW-WIFI-AX3D-10G-EHR

ULP WIFI accelerometer with ±10g range, with auxiliary external Power supply compatible with Energy Harvesting 6-24VDC

TECHNICAL SPECIFICATIONS

MAIN ACCELEROMETER SPECIFICATIONS

Accelerometer technology	High precision accelerometer based on MEMS technology
measurement range	two versions: $\pm 2g$ and $\pm 10g$
Sensitivity	$\pm 2g$ Version : 660 mV/g $\pm 10g$ version: 200 mV/g
Typical non-linearity	$\pm 0.1\%$ FS
Analog to Digital converter	24-bit delta-sigma with temperature compensation Synchronous measurement channel
Sensor frequency response (-3 dB)	DC to 800 Hz
Maximum sampling rate	2 kSPS per axis
Noise spectral density	$\pm 2g$ Version : 45 $\mu g/\sqrt{Hz}$ $\pm 10g$ version: 100 $\mu g/\sqrt{Hz}$
Zero-g Offset Variation from RT over Temp	$\pm 2g$ Version : ± 0.2 mg/ $^{\circ}C$ $\pm 10g$ version: ± 0.1 mg/ $^{\circ}C$
Sensitivity Variation from RT over Temp	$\pm 2g$ Version : ± 0.01 %/ $^{\circ}C$ (XY), ± 0.02 %/ $^{\circ}C$ (Z) $\pm 10g$ version: ± 0.01 %/ $^{\circ}C$
Offset Ratiometric Error	$\pm 2g$ Version : 4mg $\pm 10g$ version: $\pm 0.2\%$ (XY), $\pm 0.1\%$ (Z)
Sensitivity Ratiometric Error	$\pm 2g$ Version : $\pm 1.25\%$ (X-Y), $\pm 0.2\%$ (Z) $\pm 10g$ Version : $\pm 1.6\%$ (X-Y), $\pm 0.2\%$ (Z)
Cross Axis Sensitivity	0.02
Onboard temperature sensor	Range $-40^{\circ}C$ to $+65^{\circ}C$, accuracy $\pm 1^{\circ}C$
Anti-aliasing Hardware filter	Butterworth 2th order filter

ADVANCED VIBRATION ANALYSIS TOOL (AVAILABLE ON BEANSCAPE® WILOW® PREMIUM AND RA)

Software Filter	<ul style="list-style-type: none"> • Low-Pass Infinite Impulse Response Filter (IIR)
Fast Fourier Transform (FFT)	<ul style="list-style-type: none"> • Online and Offline FFT • FFT Window Type (offline FFT only): Rectangular/Hamming/Hann/Blackman/Blackman Harris/ Gaussian/Kaiser/Taylor/Triangular/Flattop/Bartlett Hann • Automatic FFT Report (Email Transmission) • Configurable Number of FFT points, 128 to 32768 points
Peak Particle de Velocity (PPV)	Available only on the BeanDevice Wilow AX-3D with $\pm 2g$ of range: <ul style="list-style-type: none"> • PPV Log file (Email Transmission) • Automatic DIN4150-3 report (Email Transmission)
Displacement measurement	Available only on the BeanDevice Wilow AX-3D with $\pm 2g$ of range

TECHNICAL SPECIFICATIONS

SHOCK SENSOR SPECIFICATIONS (FOR SMART SHOCK DETECTION FUNCTION)

Shock Sensor technology	MEMS technology
Shock sensor range	$\pm 2g/\pm 4g/\pm 6g/\pm 8g/\pm 16g$ dynamically selectable from the BeanScape software
Sensitivity	$\pm 2g$ range: 0.06 mg/digit $\pm 4g$ range: 0.12 mg/digit $\pm 6g$ range: 0.18 mg/digit $\pm 8g$ range: 0.24 mg/digit $\pm 16g$ range: 0.48 mg/digit
Typical non-linearity	$\pm 0.15\%$ on the FS
Analog to Digital converter	16-bit with temperature compensation
Sensor frequency response (-3 dB)	DC to 800 Hz
Maximum sampling rate	1.6 kSPS per axis
Noise spectral density	150 $\mu g/\sqrt{Hz}$
Sensitivity change Vs temperature	$\pm 0.01\%$ /°C
Zero-g level change vs temperature (max delta from 25°C)	± 0.5 mg/°C
Typical zero-g level offset accuracy	± 40 mg
Anti-aliasing Hardware filter	Butterworth 2th order filter

REMOTE CONFIGURATION PARAMETERS

Data Acquisition mode (SPS = sample per second)	<ul style="list-style-type: none"> • Low Duty Cycle Data Acquisition (LDCDA) Mode: 1s to 24 hour • Alarm -Low duty cycle: 1s to 24 hour • Streaming mode : 100 SPS by default • Streaming with event-trigger (SET) Mode : 100 SPS by default
Sampling Rate (in streaming mode)	Minimum: 1 SPS per axis Maximum: 2 kSPS per axis
Alarm Threshold	High and Low Levels alarms
Power Mode	Battery Saver & Active power modes

TECHNICAL SPECIFICATIONS

RF SPECIFICATIONS

Wireless Protocol Stack	IEEE 802.11 b/g/n
WSN Topology	Point-to-Point / Star / Cluster-Tree
Crypto Engine	WPA2, WPS2
Data rate	UDP: 16 Mbps TCP: 13 Mbps
RF Characteristics	ISM 2.4GHz. Antenna diversity designed by Beanair®
TX Power	18 dBm @ 1 DSSS 14.5 dBm @ 54 OFDM
Rx Sensitivity	-95.7 dBm @1 DSSS -74.0 dBm @54 OFDM
Maximum Radio Range	200m (L.O.S), Radio range be extended by adding Wifi Bridge/Repeater
Antenna	Antenna diversity : 2 omnidirectional antenna with a gain of 2.8 dBi
OTA	Over the air firmware upgrade via WIFI

USB SPECIFICATIONS

USB standard	USB 2.0
Data Rate	Full speed operation(12MB/s)
Related functions	<ul style="list-style-type: none"> Firmware update Wifi & system configuration

EMBEDDED DATA LOGGER

Storage Capacity	up to 5 million data points
Wireless data downloading	3 minutes to download the full memory (average time)

TECHNICAL SPECIFICATIONS

ENVIRONMENTAL AND MECHANICAL

Casing	Aluminum casing Dimensions in mm (LxWxH):35x59x65 mm without antenna & eyelet, Weight (with internal battery, w/o mounting option) : 220g
IP NEMA Rating	Ip67 Nema 6
Shock resistance	100g during 50 ms
Operating Temperature	-40 °C to +65 °C
Norms & Radio Certifications	<ul style="list-style-type: none"> • CE Labelling Directive R&TTE (Radio) ETSI EN 300 328(Europe) • FCC (North America) • ARIB STD-T66 Ver. 3.6 (Japan) • ROHS - Directive 2002/95/EC

POWER SUPPLY

Rechargeable battery	High density Lithium-Ion rechargeable battery with a capacity of 780 mAh
Integrated battery charger	Integrated Lithium-ion battery charger with high precision battery monitoring
Current consumption @ 3.3V	<ul style="list-style-type: none"> • During data acquisition : 20 to 30 mA • During Radio transmission : 1 DSSS - 278 mA 54 OFDM - 229 mA • During sleep power mode : < 100 µA
External power supply	<ul style="list-style-type: none"> • USB Power supply 5V • Optional auxiliary external Power Supply: 6VDC to 24VDC compatible with solar energy harvesting

INCLUDED ACCESSORIES


M8 plastic cap	1pcs, Ref: WL-PC
M8 to USB cable	1pcs M8-6pins to USB Cable, 2 meters length. Ref: WL-CBL-M8-6P-USB-2M
Magnet for power on/power off	1pcs Magnet. Ref: WL-MGN
Wall mounting kit	4 pcs M5 screws+ Locknut. Ref: WL-WIFI-SCMKIT

TECHNICAL SPECIFICATIONS

OPTIONAL ACCESSORIES AND SERVICES

Power-supply	Wall plug-in, Switchmode power Supply 12V @ 1,25A with USB plug. Provided with power adapter: North America/Japan/China or Europe or UK or Australia
M8 Cable	M8-6Pins Cable, Waterproof (IP67) and shielded cable , cable length : • 2 meters. Ref: WL-CBL-M8-6P-2M • 5 meters. Ref: WL-CBL-M8-6P-5M
WIFI AP / Repeater / Bridge (wifi link extension)	Wireless AP/Repeater with an integrated N-Type RF connector + High Gain Antenna Wifi Access Point/Bridge/Repeater Integrated N-Type RF connector + High Gain Antenna with 9 dBi of Gain. Casing : Outdoor UV Stabilized Plastic, Dimensions (w/o antenna): 190 x 46 mm, Weight: 196 g Antenna Connector: N-Type Connector (male), Power over Ethernet power supply (24VDC) Max. Power Consumption: 6 Watts , Operating Temperature: -40 to 80° C Shock and Vibration: ETSI300-019-1.4 Included: 1 x AC to 24VDC POE Power supply 1 x High Gain Antenna 9dBi 1 x Power adapter (EU or UK or US) Ref: WL-AP-UBIQ-TIT-7DBI for 7dBi Antenna Ref: WL-AP-UBIQ-TIT-9DBI for 9dBi Antenna
Solar Panel	Polycrystalline Solar Panel for BeanDevice® Wilow® power supply Maximum Power : 3W Optimum operating Voltage: 12 VDC Dimension: 235 mm x 135 mm x 17mm Protection Frame: Aluminum Frame , Waterproof IP67 Length : 2 meters (Ref: WL-SLP-3W-2M) or 5 meters (Ref: WL-SLP-3W-5M) with M8 plug for a direct to connection to the BeanDevice® Wilow® Country of origin: solar panel from China, assembled and tested in Germany
Calibration certificate	Calibration certificate provided by Beanair GmbH A static calibration method is used on a granite surface plate DIN876 (Ref: WL-CERT-CAL)

BEANDEVICE® WILOW® FRONT VIEW

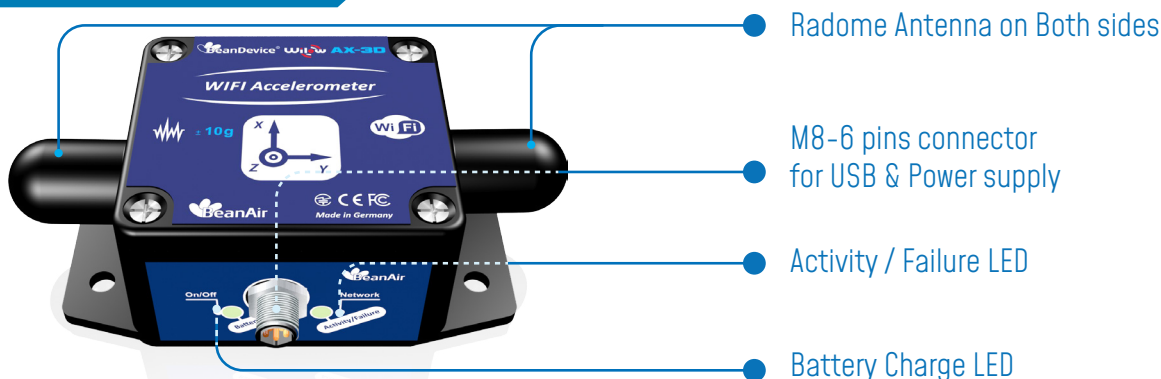

MECHANICAL MOUNTING OPTIONS

By default, the **BeanDevice® Wilow®** comes with a screw mounting lid.

Two other mounting options are available:

- Magnetic mounting, add the extension -M on your product reference
- 90° bracket, add the extension -BR on your product reference



Mechanical Mounting Options Video



CONTACT US

Headquarter:

BeanAir GmbH
Wolfener Straße 32 - 34
12681 Berlin

Email:

info@beanair.com

Phone number:

+49 30 98366680



www.temperature-screening.com




www.beanair.com



www.youtube.com/user/BeanairSensors



www.facebook.com/BeanAir



www.twitter.com/beanair

